



650V SuperJunction Power MOSFET

Features


- Extremely Low Gate Charge
- Excellent Output Capacitance (C_{oss}) Profile
- Fast Switching Capability
- 100% UIS Tested, 100% R_g Tested
- Pb-free Lead Plating
- Halogen-free and RoHS-compliant

Product Summary

Parameter	Value	Unit
V_{DS}	650	V
$V_{GS(th_Typ)}$	3.5	V
I_D (@ $V_{GS} = 10V$) ⁽¹⁾	10.0	A
$R_{DS(ON_Typ)}$ (@ $V_{GS} = 10V$)	262	m Ω
$E_{oss@400V}$	4.59	μJ

Applications

- Telecom / Server Power Supplies
- Industrial Power Supplies
- UPS / Solar
- Lighting / Charger / Adapter


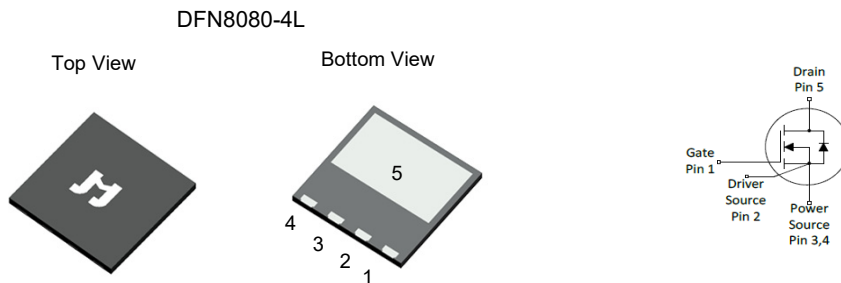


Ordering Information

Device	Package	# of Pins	Marking	MSL	T_J (°C)	Media	Quantity (pcs)
JMH65R290APLN-13	DFN8080-4L	4	H65R290A	NA	-55 to 150	13-inch Reel	3000

Absolute Maximum Ratings (@ $T_A = 25^\circ C$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Drain-to-Source Voltage	V_{DS}	650	V
Gate-to-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current ⁽¹⁾	I_D	$T_C = 25^\circ C$	10.0
		$T_C = 100^\circ C$	6.7
Pulsed Drain Current ⁽²⁾	I_{DM}	48	A
Avalanche Current ⁽³⁾	I_{AS}	7.5	A
Avalanche Energy ⁽³⁾	E_{AS}	281	mJ
Power Dissipation ⁽⁴⁾	P_D	$T_C = 25^\circ C$	63
		$T_C = 100^\circ C$	25
Junction & Storage Temperature Range	T_J, T_{STG}	-55 to 150	$^\circ C$

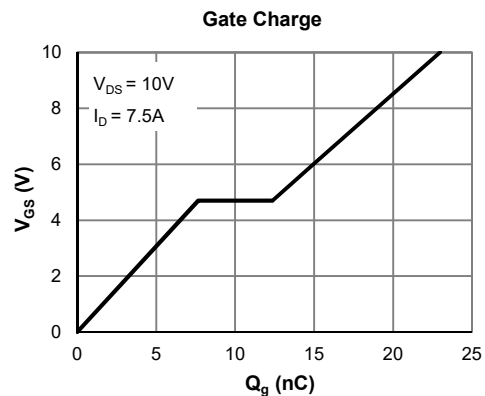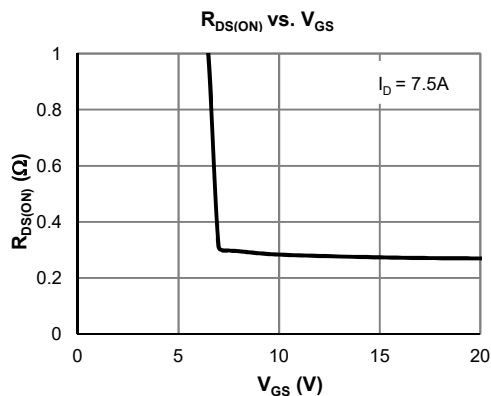



Electrical Characteristics (@ T_J = 25°C unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
STATIC PARAMETERS						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	I _D = 250μA, V _{GS} = 0V	650			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 650V, V _{GS} = 0V			1.0	μA
Gate-Body Leakage Current	I _{GSS}	V _{DS} = 0V, V _{GS} = ±20V			±100	nA
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250μA	2.5	3.5	4.5	V
Static Drain-Source ON-Resistance	R _{DS(ON)}	V _{GS} = 10V, I _D = 7.5A		262	290	mΩ
Diode Forward Voltage	V _{SD}	I _S = 1A, V _{GS} = 0V		0.75		V
Diode Continuous Current	I _S	T _C = 25°C			10	A
DYNAMIC PARAMETERS ⁽⁵⁾						
Input Capacitance	C _{iss}	V _{GS} = 0V, V _{DS} = 325V, f = 1MHz		1056		pF
Output Capacitance	C _{oss}			31		pF
Effective output capacitance, energy related	C _{o(er)}	V _{GS} =0V, V _{DS} =0...400V		57		pF
Effective output capacitance, time related	C _{o(tr)}	I _D =constant, V _{GS} =0V, V _{DS} =0...400V		182		pF
Reverse Transfer Capacitance	C _{rss}	V _{GS} = 0V, V _{DS} = 325V, f = 1MHz		10.0		pF
Gate Resistance	R _g	f = 1MHz		9.3		Ω
SWITCHING PARAMETERS ⁽⁵⁾						
Total Gate Charge (@ V _{GS} = 10V)	Q _g	V _{GS} = 0 to 10V		22		nC
Gate Source Charge	Q _{gs}	V _{DS} = 325V, I _D = 7.5A		7.8		nC
Gate Drain Charge	Q _{gd}			7.2		nC
Turn-On DelayTime	t _{D(on)}			15.4		ns
Turn-On Rise Time	t _r	V _{GS} = 10V, V _{DS} = 325V		12.0		ns
Turn-Off DelayTime	t _{D(off)}	R _L = 43Ω, R _{GEN} = 6Ω		58		ns
Turn-Off Fall Time	t _f			55		ns
Body Diode Reverse Recovery Time	t _{rr}	I _F = 7.5A, di/dt = 100A/μs		280		ns
Body Diode Reverse Recovery Charge	Q _{rr}	I _F = 7.5A, di/dt = 100A/μs		3.42		μC
Peak Diode Recovery Voltage Slope	dv/dt	I _F ≤ 7.5A, di/dt = 200A/μs, V _{DS} = 400V		15		V/ns
MOSFET dv/dt Ruggedness	dv/dt	V _{DS} = 0...400V		50		V/ns

Thermal Performance

Parameter	Symbol	Typ.	Max.	Unit
Thermal Resistance, Junction-to-Ambient	R _{θJA}	55	68	°C/W
Thermal Resistance, Junction-to-Case	R _{θJC}	1.5	2.0	°C/W

Notes:

1. Computed continuous current assumes the condition of T_{J_Max} while the actual continuous current depends on the thermal & electro-mechanical application board design.
2. This single-pulse measurement was taken under T_{J_Max} = 150°C.
3. This single-pulse measurement was taken under the following condition [L = 10mH, V_{GS} = 10V, V_{DS} = 50V] while its value is limited by T_{J_Max} = 150°C.
4. The power dissipation P_D is based on T_{J_Max} = 150°C.
5. This value is guaranteed by design hence it is not included in the production test.



Typical Electrical & Thermal Characteristics

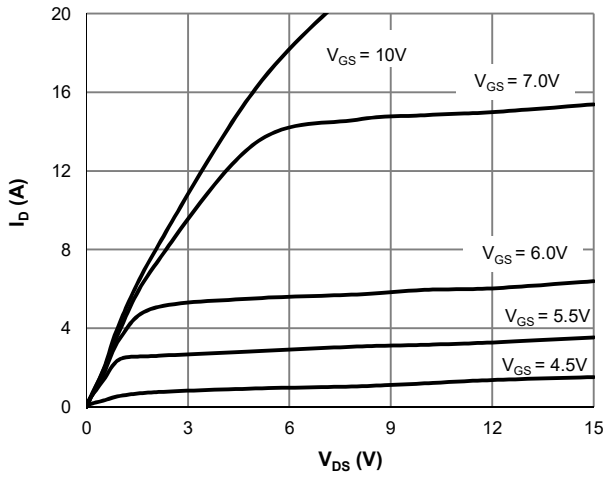


Figure 1: Saturation Characteristics

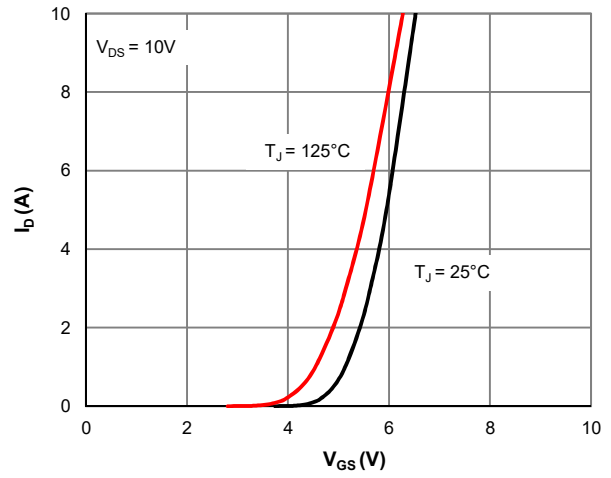


Figure 2: Transfer Characteristics

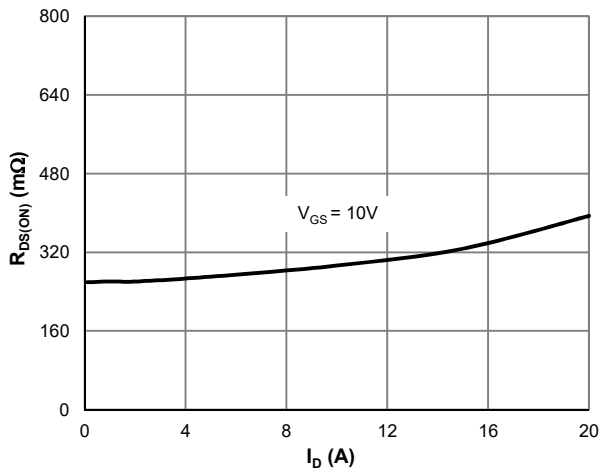


Figure 3: $R_{DS(ON)}$ vs. Drain Current

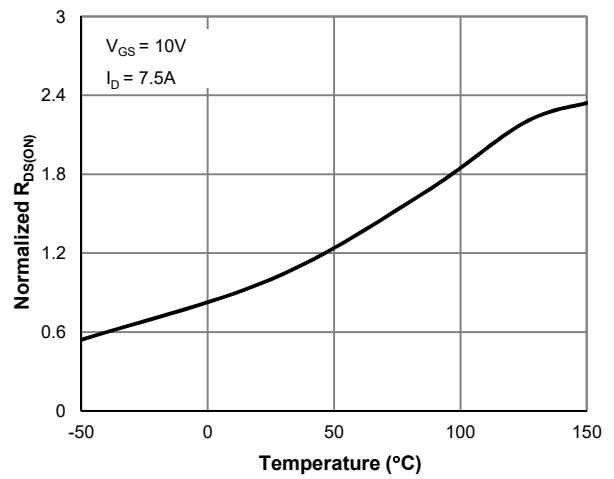


Figure 4: $R_{DS(ON)}$ vs. Junction Temperature

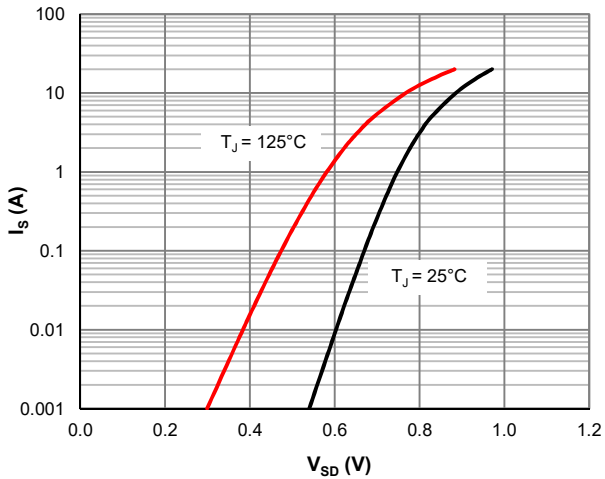


Figure 5: Body-Diode Characteristics

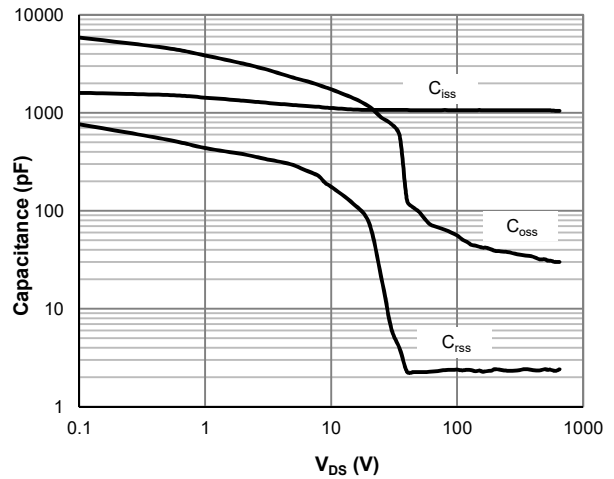
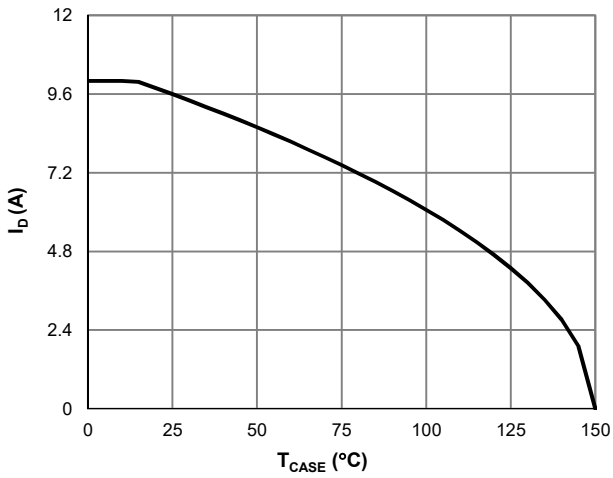
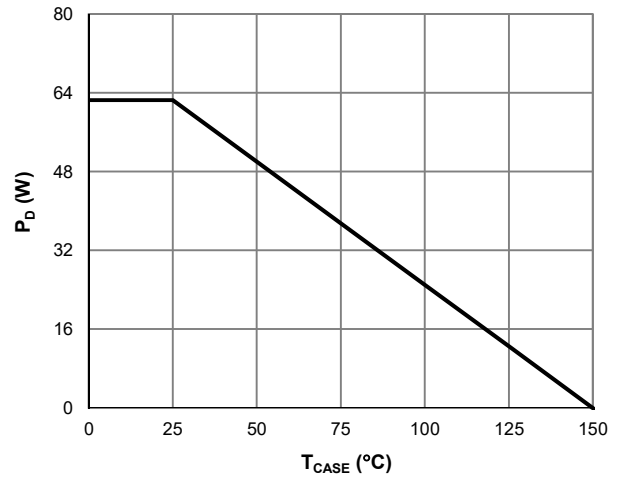
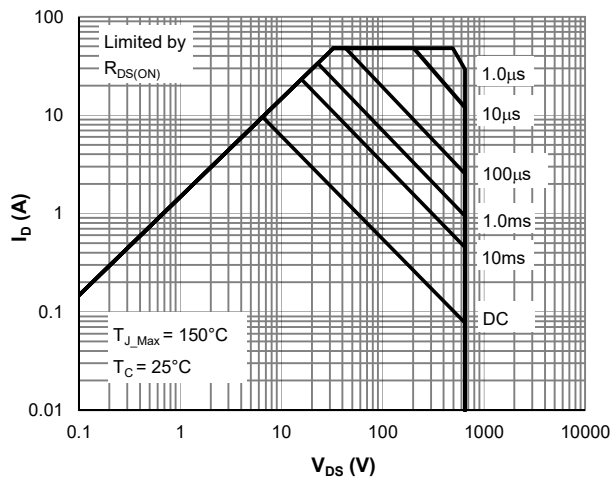
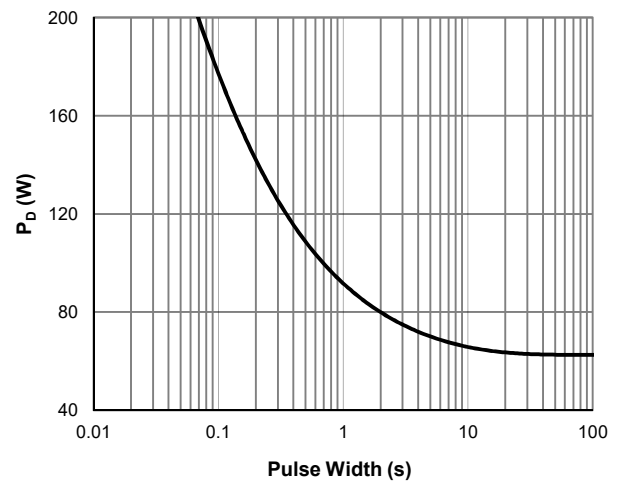
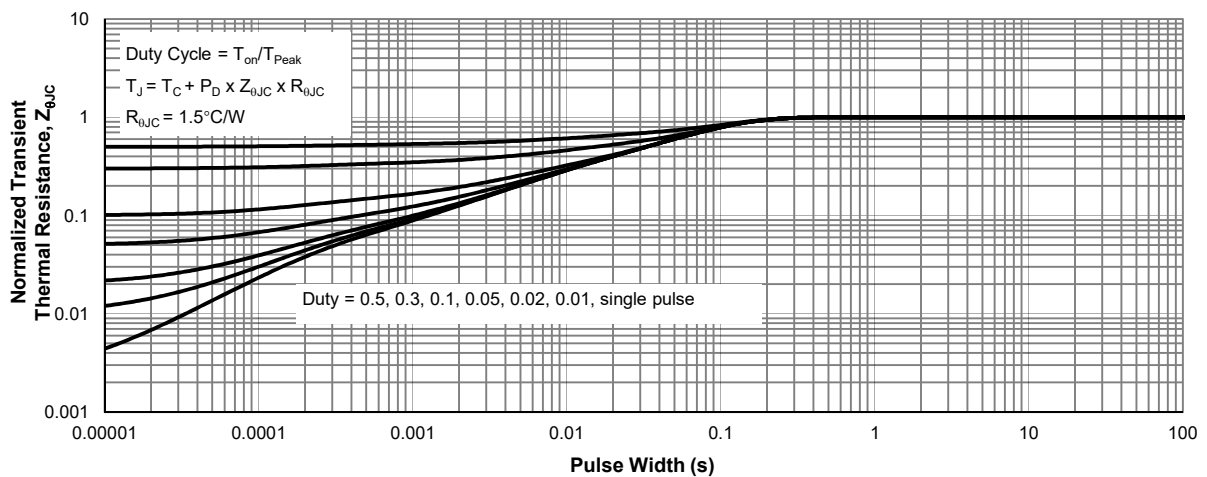
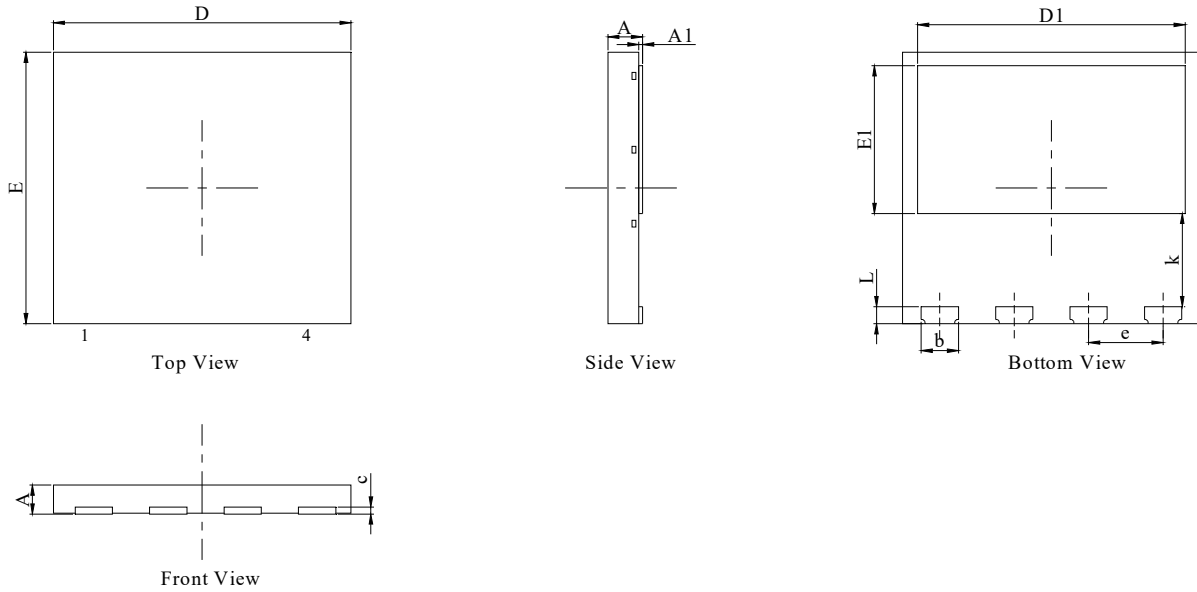


Figure 6: Capacitance Characteristics

Typical Electrical & Thermal Characteristics

Figure 7: Current De-rating

Figure 8: Power De-rating

Figure 9: Maximum Safe Operating Area

Figure 10: Single Pulse Power Rating, Junction-to-Case

Figure 11: Normalized Maximum Transient Thermal Impedance

DFN8080-4L Package Information
Package Outlines


DIM.	MILLIMETER		
	MIN.	NOM.	MAX.
A	0.85	0.90	0.95
A1	--	--	0.05
b	0.95	1.00	1.05
c	--	0.20	--
D	7.90	8.00	8.10
D1	7.10	7.20	7.30
E	7.90	8.00	8.10
E1	4.25	4.35	4.45
L	0.40	0.50	0.60
k	2.75		
e	2.00 BSC		

Recommended Soldering Footprint
